



## SIGNING FOR ROAD CLOSURE (STRUC. NO. 001-3027 ONLY)

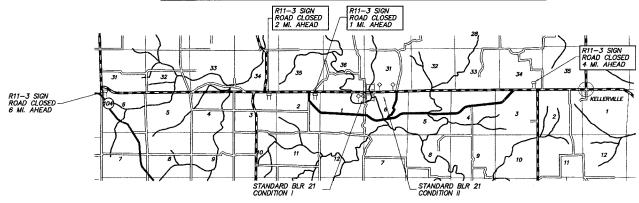


### SIGNING FOR ROAD CLOSURE (STRUC. NO. 001-3028 ONLY)

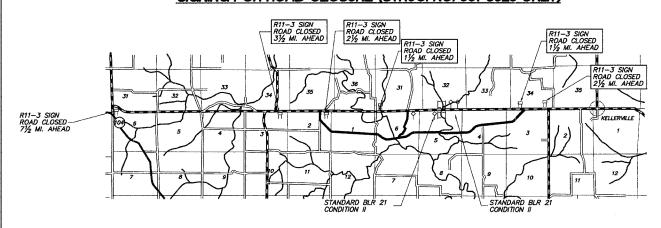


PROJECT NO. RS-1588(106) COUNTY ROUTE SECTION NO. SHT. NO. ADAMS FAS 1588 05-00190-00-BR 3 OF 38 GENERAL NOTES, TYPICAL SECTIONS TRAFFIC CONTROL - ROAD CLOSURE

# EXISTING TYPICAL CROSS SECTION

LOCATION #1 - STA. 339+50 TO STA. 334+00 LOCATION #2 - STA. 405+00 TO STA. 410+00

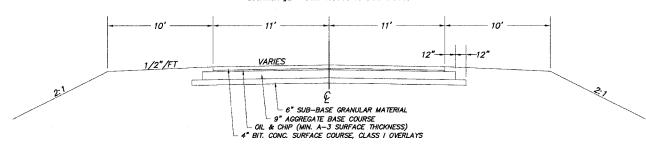

# PROPOSED TYPICAL CROSS SECTION

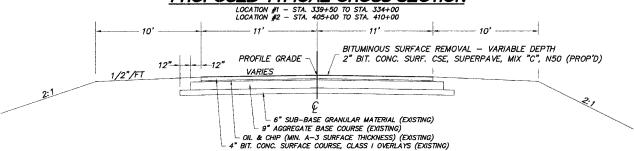

### GENERAL NOTES

- 1. WHERE SECTION OR SUBSECTION MONUMENTS ARE ENCOUNTERED, THE ENGINEER SHALL BE NOTIFIED BEFORE SUCH MONUMENTS ARE MOVED. THE CONTRACTOR SHALL PROTECT AND CAREFULLY PRESERVE ALL PROPERTY MARKS AND MONUMENTS UNTIL THE OWNER OR AN AUTHORIZED SURVEYOR OR AGENT HAS WITNESSED OR OTHERWISE REFERENCED THEIR LOCATION.
- 2. PAVEMENT MARKINGS SHALL BE DONE BY THE ADAMS COUNTY HIGHWAY DEPARTMENT UPON COMPLETION.
- 3. THE UTILITY LOCATIONS NOTED ON THE PLANS ARE APPROXIMATE AND FOR REFERENCE ONLY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING THE ACTUAL LOCATION OF THE UTILITY.
- 4. THE SHOULDER AND SLOPE GRADING SHOWN ON THE CROSS SECTIONS IS FOR REFERENCE ONLY. FINAL GRADING AND SHAPING OF THE SHOULDERS AND SLOPES TO BE DONE BY THE ADAMS COUNTY HIGHWAY DEPARTMENT.

#### BITUMINOUS CONCRETE MIXTURE REQUIREMENTS

ITEM	AGGREGATE COMPOSITION	ASPHALT GRADE	ALLOWABLE RAP	VOIDS
 SURFACE, SUPERPAVE	IL-9.5 MIX "C"	PG 64-22	15%	4.0% @ N50

## APPLICATION RATES

BITUMINOUS MATERIALS (PRIME COAT) BITUMINOUS CONCRETE MATERIALS

0.05-0.25 GAL./SQ.YD. 112#/SQ.YD. PÉR 1" THICK